

WA-Encapsulating Repair Couplings

232 psi (PN16) bolted ENCAPSULATION SLEEVES

Application:

Up to 16 mm tolerant encapsulating pipe joint repair sleeves.


Repair pipes, bell joints, weld joints.

Suitable for use as a coupling.



Technical concept

Wide tolerance permanent repair collars, encapsulation collars provide the fastest and cost effective solution to high and low pressure pipe repair problems. Available in diameters are available on request.

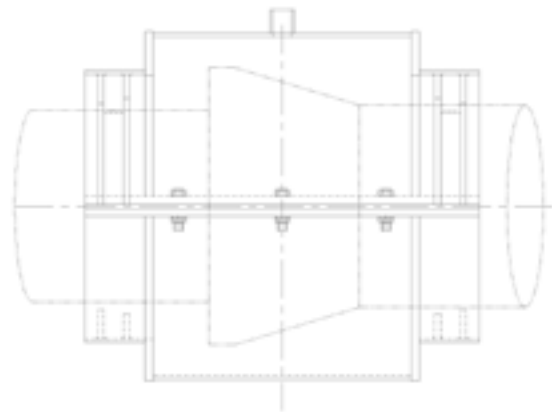

Advantages

- Only side bolts to be tightened.
- Suitable for any pipe material.
- Angular compensation of up to 6° before or after installation
- The same fitting can be used either to repair a leaking socket or a damaged pipe.
- 360° coverage.
- High pressure rating.
- Long body to account for the majority of repair issues.

232 psi PN16 WIDE-TOLERANCE ENCAPSULATION SLEEVES.


Application

Wide range encapsulation collar, 30 mm tolerance on pipe outside diameter for repairing pipes, sockets, leaking elements or hot-tapping applications.



Technical concept

Universal wide tolerance permanent repair collars, encapsulation collars and tapping tees that provide solution to high and low pressure repair problems and tapping issues. **Available in diameters from 350 mm to 1200 mm.** Other diameters are fabricated on request.

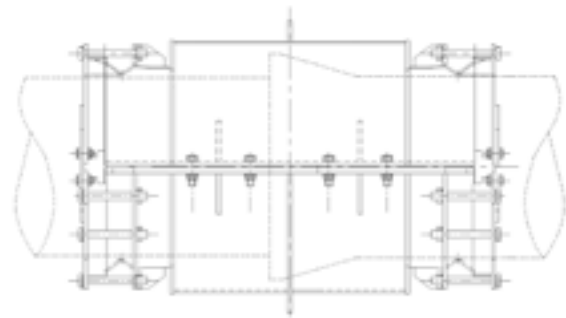

Advantages

Fit large pipe diameters.
Repair Bell Spigot leaks, Weld joint leaks, Coupling leaks.
Pipeline remains in service.